

Extruded Brackets - For 1 Slot


For 8 Series (Slot Width 10mm) Aluminum Extrusions



HBLTF8




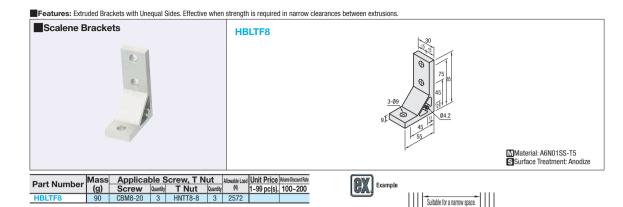


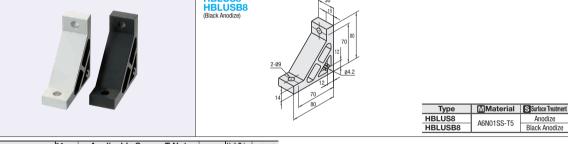

			de Screw, i nut			Allowable Load	OHIL I HOC	Policia and and and a second
Part Number	(g)	Screw	Quantity	T Nut	Quantity	(N)	1~99 pc(s).	100~200
HBLUS8								
HBLUSB8* (Black Anodize)	151	CBM8-25	2	HNTT8-8	2	2058		


^{*} For repairing black anodizing, refer to P.846.



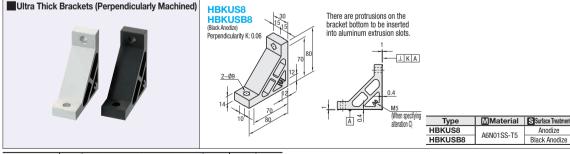


Part Number	Mass	Applical	ble S	Screw, T Nu	t	Allowable Load		
Part Number	(g)	Screw	Quantity	T Nut	Quantity	(N)	1~99 pc(s).	100~20
HBKUS8								
HBKUSB8* (Black Anodize)	151	CBM8-25	2	HNTT8-8	2	2058		

^{*} For repairing black anodizing, refer to P.846.

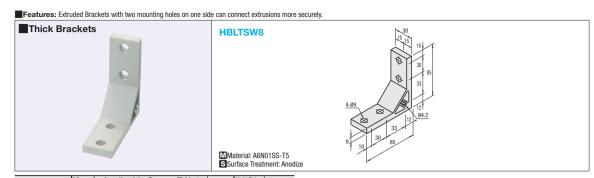

	Dout Number	Mass	Applicat	ole S	Screw, T N	ut	Allowable Load	Unit Price	Volume Discount Rate	
Part Number	(g)	Screw	Quantity	T Nut	Quantity	(N)	1~99 pc(s).	100~200		
	HBLTSW8	113		4	HNTT8-8	4	3087			

Features: Brackets with two mounting holes on one side can connect extrusions more securely.

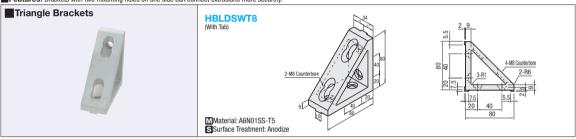


Dout Number	Mass	Applicat	Applicable Screw, T Nut Screw Quantity T Nut Quantity				Unit Price	Volume Discount Rate
Part Number	(g)	Screw	Quantity	T Nut	Quantity	(N)	1~99 pc(s).	100~200
HBLDSWT8	195	CBM8-15	4	HNTT8-8	4	3087		










Part Number	Mass	Applicable Screw, T Nut				Unit Price	Volume Discount Rate
Part Number	(g)	Screw	Quantity	T Nut	Quantity	1~99 pc(s).	100~200
HBLTS8-6L		CBM6-20		HNTT8-6			
HDLI 30-0L	66	CBM6-15] ,	HNTT6-6	1		
HBLTS8-6R	00	CBM6-20	'	HNTT8-6	'		
HDLI 30-0N		CBM6-15		HNTT6-6			





Alterations	Code	Spec.	Applicable Bracket		
Mounting Hole Alteration for Cover		Adds taps on a bracket for cover mounting.	HBLTF8		
	С	(M5 on Both Sides) (Mounting Screw HCBM on P.754)	HBLUS8		
			HBKUS8		
			HBLTSW8		
			HBLTS8-6L*		
		Tapped Hole Position	HBLTS8-6R*		



Alterations	Code	Spec.	Applicable Bracket					
	SET SST	SST for fixing the brackets on						
	(Stainless Steel) SEU	extrusions come in a set. (Adds to the bracket price.)	HBLUS8					
	(Pre-Assembly Insertion) Spring Nuts SSU		HBLUSB8					
	Pre-Assembly Insertion Spring Nuts Stainless Steel SEP Post-Assembly Insertion Spring Nuts SSP Post-Assembly Insertion Spring Nuts Stainless Steel SEC Carew with Captured Washer and Nuts	(Ex.) When HBLTSW8 is specified:	HBKUS8					
Applicable Screws and		Code Screw Nut SET CBM8-20 HNTT8-8 SST SCB8-20 HNTTSN8-8	HBKUSB8					
Nuts Set		OFIL ODMO OO LINTUO O	HBLTSW8					
		SEP CBM8-20 HNTP8-8 SSP SCB8-20 SHNTP8-8	HBLDSWT8					
		SEC HCBST8-24 HNTT8-8 • When specifying other than	HBLTS8-6L					
		HBLTSW8, check for the applicable screws and nuts.	HBLTS8-6R					
Screws for	(Laptured washer and Nuts) applicable screws and nuts. PDE138-0N Screws for black anodized brackets are HCRMTR (Trivalent Chromate Black) on P.751							

Screws for black anodized brackets are HCBMTB (Trivalent Chromate Black) on P.751.
Included Screw is not RoHS compliant when -SET, -SEU or -SEP other than black anodized brackets is specified