

CARTRIDGE HEATERS

-WITH STOPPER FLANGE • LEAD PROTECTION COVER-


Alteration price are also applied to quantity discount, refer to P.513

Refer to P.354 for new release lubricant seizure inhibitor

RoHS10



MCHJ

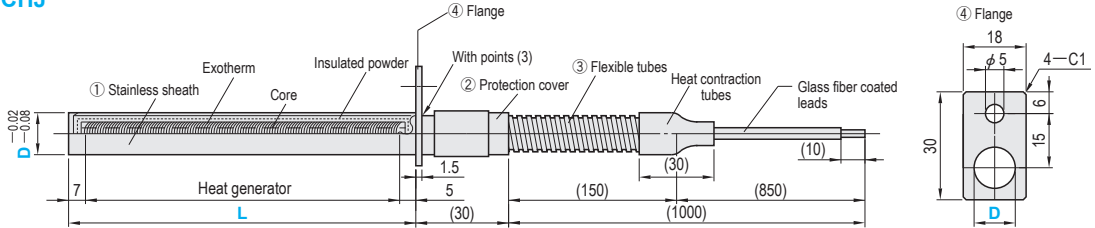

Installation method of flange is caulking or welding (3 points).

① Stainless sheath
D10 - 12 SUS321
D8 SUS316L

② Protection cover
SUS321

③ Flexible tubes
SUS304

④ Flange
SUS304

Lead heat resistance temperature 180°C

V (Voltage)	W (Wattage)	W/cm ² (Watt density)	Lead nominal cross-sectional area [mm ² ,sq]	Part Number		L	V	W	Unit Price
				Type	D				
100	120	12.6	0.75	MCHJ	8	50	100	120	1~9 pcs
	320	14.5				100		320	
	280	8.1				150		280	
	500	14.4				180		500	
	350	8.3				200		350	
	620	14.7				250		620	
	500	10.6				100		500	
	690	14.6				130		690	
	800	16.9				150		800	
	650	10.9				180		650	
	400	14.5				200		400	
	300	8.1				250		300	
200	400	9.2	0.75	MCHJ	10	100	200	400	Quotation
	630	14.5				130		630	
	400	7.6				150		400	
	450	7.6				180		450	
	650	11.0				200		650	
	860	14.6				250		860	
	1000	16.9				300		1000	
	600	8.0				100		600	
	880	11.8				130		880	
	1100	14.7				150		1100	
	1300	17.4				180		1300	
	1300	14.4				200		1300	
200	480	14.5	0.75	MCHJ	12	100	200	480	Quotation
	650	12.5				150		650	
	800	12.6				180		800	
	900	12.7				200		900	
	1050	14.8				250		1050	
	950	10.6				100		950	
	1300	14.5				130		1300	
	1500	16.7				150		1500	



Order

Part Number - L - V - W
MCHJ10 - 100 - V200 - W400



Days to Ship

Quotation




Price

Quotation



Example

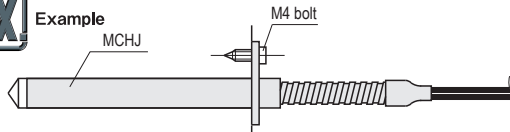

Features

- A flange prevents cartridge heater coming off from the mold.
- Protection cover at the bottom prevents direct pulling of the lead when removing the heater.
- Flexible tube prevents lead from breaking caused by fatigue when heater is used on the movable side.
- Minimum bending R of flexible tubes

D	R
8	27.5
10	37.5
12	37.5

- Flexible tubes are not waterproof. Please be sure it does not come in contact with water.
- The plate side hole processing of flange is the same with MFCH (P.340). (D8~12)